


TR1500 series

**ASSYMETRICAL CYCLIC TIMER
8 PIN PLUG-IN**

The TR1500 time relay is suitable for applications where a repeated on/off time function is required. Each unit allows independent user adjustment of both 'on' and 'off' time cycles:-

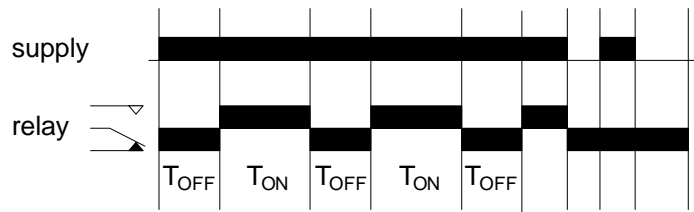

The 'off' time period (T_{OFF} above) begins as soon as the TR1500 is powered up. At the end of the 'off' time, the relay energises and remains energised for the 'on' time (T_{ON}). At the end of the 'on' time, the relay de-energises and the cycle repeats for as long as the power supply is maintained. The relay and both timers reset whenever the power supply is removed.


The time periods are set on two user-adjustable, single turn potentiometer on top of the unit. Standard adjustment ranges are available to 2.5, 25, 100, 250 seconds and 10 hours. Two red LEDs on the top facia indicate 'power on' and 'relay energised'.

Standard supply voltage variations are 24VDC, 110VAC or 230VAC.

Electrical connection is via an 8 pin (octal) base not supplied). Supply voltage variations are 24VDC, 110VAC or 230VAC. On standard units, the base locating pip is positioned down in relation to the timescale label. The units are enclosed in a robust, black polycarbonate case.

When ordering, please specify:-


- a) Product type number (TR1500)
- b) Power supply voltage
- c) Time range

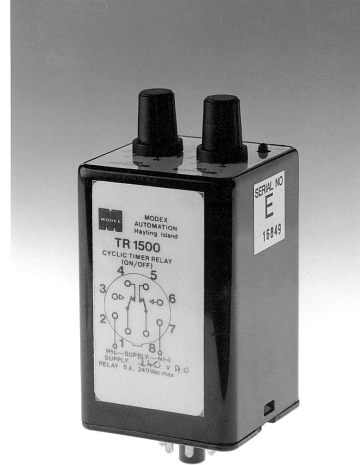


Product Specifications

	24VDC	110VAC	230VAC
Input/Power supply:			
supply voltage range	18 - 32 VDC	90 - 130 VAC	190 - 250 VAC
supply frequency range	N/A	50 / 60 Hz.	
power consumption	< 2 W		< 10 VA
Time settings:			
adjustment ranges		various, up to 25 minutes	
time variability		< 1%	
minimum time setting		approx. 2% of maximum setting	
Relay output:			
contact type		volt free DPCO contacts	
current rating		5 A max. @ 240 V AC (resistive load)	
rated operations		2 x 10 ⁵ operations	
General:			
operating temp. range		-10 to +55°C	
weight		approx. 125g	

Connection

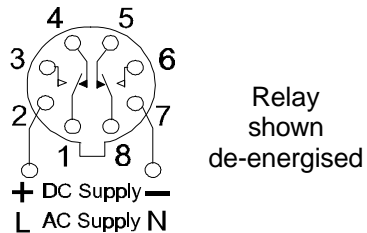

Dimensions

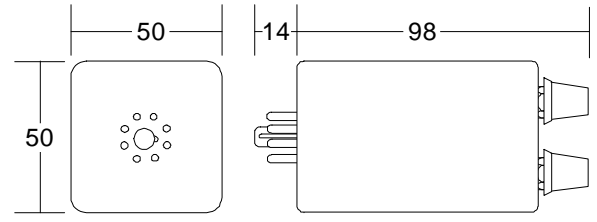

FRANK W. MURPHY
Since 1939 MFR.
Frank W. Murphy Manufacturer
PO Box 470248, Tulsa, Oklahoma 74147, USA
Tel: +1 918 627 3550 Fax: +1 918 664 6146
email: sales@fwmurphy.com
web: http://www.fwmurphy.com

Frank W. Murphy Ltd.
Incorporating Modex Automation
Church Road, Laverstock, Salisbury U.K.
Tel: +44 1722 410055 Fax: +44 1722 410088
Pour service en Français, tél: +44 1722 410697
email: sales@fwmurphy.co.uk
web: http://www.fwmurphy.co.uk

Frank W. Murphy Ltd. en France
Tel: +33 (1) 30 76 26 26 Fax: +33 (1) 30 76 39 89
Direct usiné Tel: +44 1722 410697
email: sales@fwmurphy.co.uk

Frank W. Murphy Pte. Ltd.
No. 2 Tuas South Street 2, Sprintecs Building
02-01/02, Singapore 637895
Tel: +65 863 1398 Fax: +65 863 0208
email: fwmsales@fwmurphy.com.sg

Frank W. Murphy Southern Division
PO Box 1819, Rosenberg, Texas 77471, USA
Tel: +1 281 342 0297 Fax: +1 281 341 6006
email: sales@fwmurphy.com

Murphy Switch of California
41343 12th Street West, Palmdale, CA 93551, USA
Tel: +1 661 272 4700 Fax: +1 661 947 7570
email: sales@murphyswitch.com
web: http://www.murphyswitch.com

Macquarrie Corporation
1620 Hume Highway, Campbellfield, Vic. 3061 Australia
Tel: +61 3 9358 5555 Fax: +61 3 9358 5558
email: murphy@macquarrie.com.au

Murphy de Mexico S.A. de C.V.
Blvd. Antonio Rocha Cordero 300, Fracción del Aguaje
San Luis Potosí, S.L.P. México 78384
Tel: +52 48 206264 Fax: +52 48 206336
email: murmexsi@sanluis.podernet.com.mx