


For 12 and 24 Volt Operation

Includes 12 digital inputs,
8 analog inputs and 12 outputs

Robust, Sealed Enclosure with
Cast Aluminum Base

More Reliable Than Fuse
and Relay Technology

Cuts Wire Harness Costs

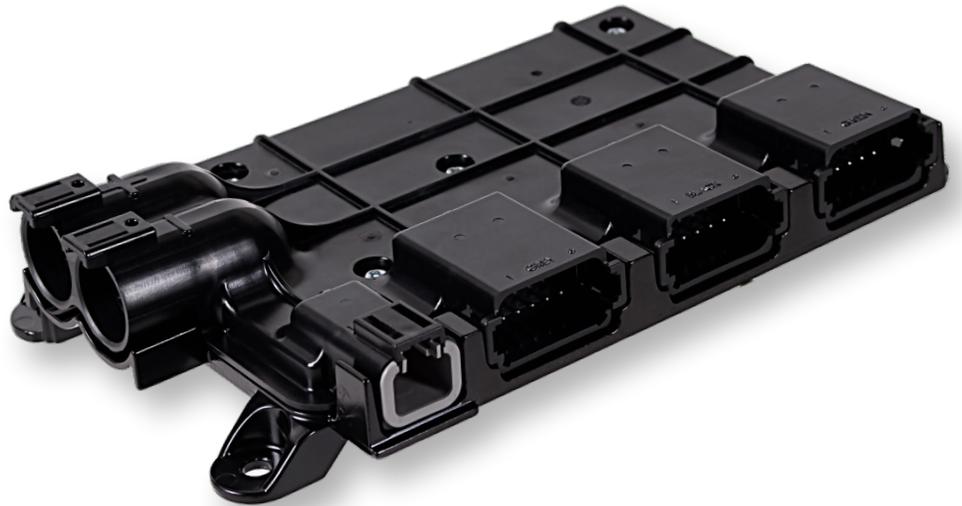

POWER DISTRIBUTION MODULE FOR RELIABLE, INTEGRATED MACHINE AND EQUIPMENT CONTROL

The Murphy IX3212 Intelligent Xpansion™ power distribution module expands CAN bus control networks by replacing existing relay and fuse boxes with more reliable, solid-state switches that can directly drive work lights, wiper motors, cooling fans, directional DC motors and other high-current loads.

Each of the 12 PDM outputs can switch or proportionally control up to 15 A loads in 2.5 A increments and feature over-current detection and shut-down capability. Outputs are paired to run up to six electric motors with H-bridge direction control.




Twelve digital inputs monitor switched battery, ground and floating inputs. Additionally, six 0-5V analog inputs and two resistive inputs are available with a 5V sensor supply.

With the IX3212 module, total wiring length can be reduced, and harness costs cut by remotely locating a unit near loads and signals. Then, I/O is multiplexed over the CAN bus network, allowing engineers to simplify harness design for ease of installation and improve reliability. For applications not requiring a CAN bus control, the inputs can directly trigger outputs without a need for a separate controller.



IP
69K

DIMENSIONS

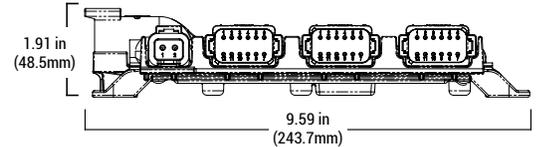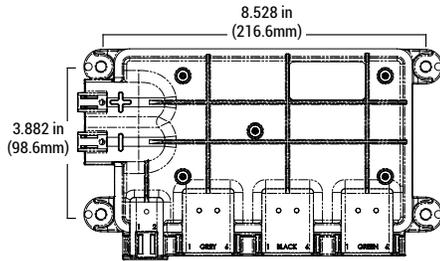

SPECIFICATIONS

| ELECTRICAL | |
|--------------------------|---|
| OPERATING VOLTAGE | 8-32 VDC (Reverse Polarity Protected) |
| OPERATING CURRENT | Total: 70A, simultaneous active outputs Standby (idle) current draw: < 155 mA Sleep current draw: < 3 mA |
| INPUTS | (12) digital tri-state (high side, low side, open) <ul style="list-style-type: none"> • 12V High Side ONmin: 9.0 V • 12V Low Side ONmax: 2.9 V • 24V High Side ONmin: 18.0 V • 24V Low Side ONmax: 6.0 V (6) analog 0-5V (100 kΩ pull-down) (2) analog resistive (2.2 kΩ pull-up to 5 VDC) |
| OUTPUTS | (12) Digital High current (15 A each/70 A total) <ul style="list-style-type: none"> • Configurable as High-side, PWM or up to 6 H-bridge pairs • PWM frequency: 1000Hz (all outputs) • Maximum off state leakage current: <0.1 mA |
| OPENLOADDETECTION | < 100 mA |
| SENSOR SUPPLY | 5 VDC @ 70 mA |
| COMMUNICATION | |
| CAN INTERFACE | CAN 2.0B Active, SAE J1939 Proprietary messaging, 250 kbps |
| HARDWARE | |
| CONNECTORS | Nickel plated copper alloy contact surface Deutsch DT series 12 pin (J3, J4, and J5) Deutsch DTP series 2 pin (J6) Deutsch DT HD power series 1 pin (J1 and J2) |

| ENVIRONMENTAL | |
|-----------------------------|---|
| OPERATINGTEMPERATURE | -40° to +185°F (-40° to +85°C) |
| STORAGE TEMPERATURE | -40° to +221°F (-40° to +105°C) |
| INGRESS PROTECTION | IP67, IP69K with protective boot |
| VIBRATION | 5.82 grms, 8 hrs per axis |
| SHOCK | 50g 6ms |
| HOUSING | PBT cover, E-coated cast aluminum base, internally potted, integrated mounting feet |
| EMC/EMI | EN 61000-4-3, SAE J1113-26, ISO 22452-2, ISO 11452-10, CE Mark per 2014/30/EU |
| DIMENSIONS | Width: 5.54 in. (140.7 mm) Height: 1.91 in. (48.5 mm) Length: 9.59 in. (243.7 mm) |
| WEIGHT | 2 lb. (900 gram) |

⚠ WARNING: This product can expose you to chemicals known to the State of California to cause cancer. For more information, go to www.P65Warnings.ca.gov

FOR MODEL & PART INFORMATION

ENOVATIONCONTROLS.COM/PDM

FOR MANUAL & SUPPORT DOCUMENTS

SUPPORT.ENOVATIONCONTROLS.COM

FOR SUPPORT & WARRANTY

ENOVATIONCONTROLS.COM/SUPPORT

SALES CONTACT



CONTACT

✉ sales@novationcontrols.com

☎ +1 918.317.4100

www.novationcontrols.com

CORPORATE HEADQUARTERS

5311 S 122nd E Ave
Tulsa, Oklahoma, USA 74146

United States • United Kingdom • India • China



FM 28221 (Tulsa, OK-USA)
FM 29422 (UK)