



THE POWERVIEW[®] 780

FLEXIBLE CAN-BASED DISPLAY CUSTOMIZED FOR YOUR APPLICATION

	CAN-based display with rich, full-color graphics
	Compatible with both mechanical and electronic engines
	Bonded, glare-free LCD screen, viewable in direct sunlight
	Easy-to-use configuration software
	Rugged design for extreme environments
	Multiple languages




The PowerView 780 display is a full-featured, configurable display that integrates vital engine, transmission and diagnostic information into an easy-to-read operator interface. Integrate even more functionality into the display by way of the five available digital inputs. Additional switches can be wired into the display through the digital inputs and broadcast on the CAN bus.

The PV780 features a full color, 7-inch bonded LCD for brighter, smoother graphics and best-in-class


sunlight readability. The display's bonded LCD and rugged design make it a great solution for all types of environments and applications.

In addition, the PV780 display is compatible with PowerVision Configuration Studio[®] software, so custom configurations can be quickly developed. With the software tool, it's easy to customize the user interface – define custom parameters, add custom graphics, on-screen text, OEM branding and more.


STANDARD DIMENSIONS

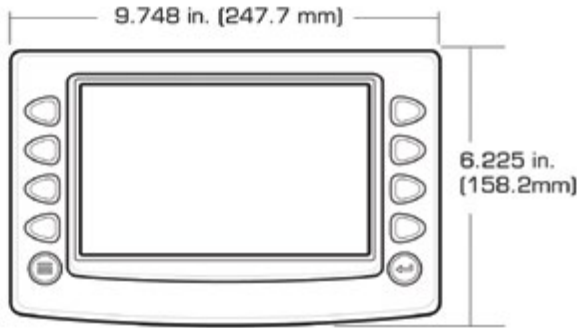

Front

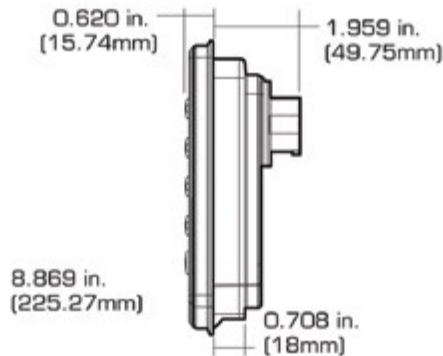

Side

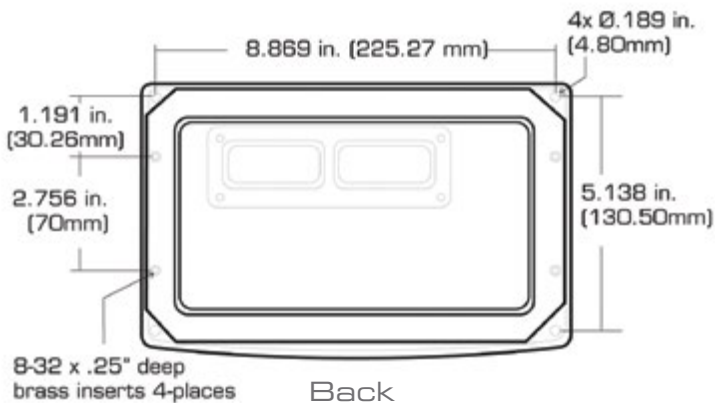

Back

TECHNICAL SPECS:

- Display: 7"/178mm color transmissive TFT LCD
- Resolution: WVGA, 800 x 480 pixels, 16-bit color
- Aspect Ratio: 16:9
- Orientation: Landscape or portrait
- Backlighting: LED, 1,000 cd/m² (40,000 h lifetime)
- Microprocessor: Freescale™ i.MX357, 32 bit, 532 MHz
- QNX® Real-time Operating System
- Flash Memory: 2 GB
- RAM: 128 Mbytes SRAM
- USB: 2.0 host (full speed)
- Real-time clock with internal non-rechargeable Li-ion battery back-up
- Operating Voltage: 6-36V, reverse polarity protected and load-dump
- Power Consumption: 10W full backlight; 22W full backlight with heater (heater active when temperature is less than -10°C)
- CAN: (2) CAN 2.0B; ISO 11898-2 high speed (transmission rates up to 1 Mbp/s); J1939 and CANopen protocols along with proprietary messaging
- RS-485: 1 MODBUS® Master/Slave port, PVA gages
- Video input: 3 NTSC/PAL, single channel displayed
- Connectors: (2) AMPSEAL 23 pin
- Keyboard: 10 tactile pushbuttons
- Inputs: (3) 0-5 VDC, 4-20mA or resistive analog inputs, (1) frequency input configurable to support measurement frequencies from 2 Hz - 10 kHz, (5) discrete digital (active high)
- Outputs: (1) digital 500mA; switched low-side, (1) frequency 2Hz - 3kHz.
- Mounting Options: Front, Back and Gimbal Mount

ENVIRONMENTAL SPECS:

- Operating and Storage Temperature: -40°C to +85°C (-40°F to +185°F)
- Protection: IP66 and 67, front and back, for outdoor use
- EMC/EMI: 2004/108/EC and 2006/95/ED directives
 - EN 61000-4-3 (radiated EMF immunity)
 - EN 61000-4-4 (EFT immunity power and I/O lines)
 - EN 61000-4-5 (surges power lines)
 - EN 61000-4-6 (RF Immunity)
 - EN 61000-4-8 (magnetic field immunity)
 - EN 60945 (ESD)
 - EN 60945 (conducted emissions)
 - HYBRID EN 60945 CISPR 11 CLASS B (radiated emissions)
- Vibration: Random vibration, 7.86 Grms (5-2000Hz), 3 axis
- Shock: ±50G in 3 axis

* MODBUS is a registered trademark of its respective owners.

ENOVIATION CONTROLS CORPORATE HEADQUARTERS
5311 S 122ND EAST AVENUE
TULSA, OK 74146

ENOVIATION CONTROLS LTD. – UNITED KINGDOM
CHURCH ROAD LAVERSTOCK
SALISBURY SP1 1QZ UK

MURPHY INTERNATIONAL TRADING – CHINA
SUITE 1704, ANTAI BUILDING, 107 ZUNYI RD
SHANGHAI, 2000 S1 CHINA

ENOVIATION CONTROLS INDIA PVT. LTD.
301, 3RD FLOOR, KRSNA CHAMBERS 11,
GALAXY GARDENS, NORTH MAIN ROAD,
KOREGAON PARK, PUNE - 411001
MAHARASHTRA, INDIA

U.S. SALES & SUPPORT

MURPHY PRODUCTS
PHONE: 918 317 4100
EMAIL: SALES@ENOVIATIONCONTROLS.COM
WWW.ENOVIATIONCONTROLS.COM

MURPHY INDUSTRIAL PANEL DIVISION
PHONE: 918 317 4100
EMAIL: IPDSALES@ENOVIATIONCONTROLS.COM

INTERNATIONAL SALES & SUPPORT

EUROPE, MIDDLE EAST, AFRICA
PHONE: +44 1722 410055
EMAIL: SALES@ENOVIATIONCONTROLS.EU

CHINA
PHONE: +86 21 6237 5885
EMAIL: APSALES@ENOVIATIONCONTROLS.COM

LATIN AMERICA & CARIBBEAN
PHONE: +1 918 317 2500
EMAIL: LASALES@ENOVIATIONCONTROLS.COM

INDIA
PHONE: +91 91581 37633
EMAIL: INDIA SALES@ENOVIATIONCONTROLS.COM



FM 28221 (Tulsa, OK - USA)
FM 29422 (UK)