

12.1 inch high definition display for rich color graphics

Powerful processor for smooth animations and video playback

Doubles the ram and storage of the PV1100

Bonded glare-free LCD screen for superior visibility in sunlight



NOT ACTUAL DISPLAY, FOR REFERENCE ONLY

HUGE, FULL-COLOR DISPLAY BRINGS THE ULTIMATE USER EXPERIENCE TO RUGGED APPLICATIONS

The PV-U120 Defines the all-new Ultimate Series of Enovation Controls' displays.

Designed specifically to address the unique needs of the recreation marine market, the PV-U120 builds off of the tried-and-true PV1100.

The Best gets Better!

- Double the ram and storage*
- A larger screen and higher resolution*
- Improved Bluetooth 5 technology*
- Same all day, all weather visibility (1000 Nits)*
- Same high horsepower processor*
- Same rugged IP67 rating*
- Same trusted I/O*
- Adds support for A2B audio and two simultaneous digital video streams over ethernet

*Compared to the PV1100

INTRODUCING THE POWERVERIEW ULTIMATE SERIES

BUILT FOR POWERVERIEW:

PowerVision Configuration Studio® software version 4.0+ lets programmers design stunning user interfaces, create intelligent applications with scripting and prototyping quickly with a vast library of standard engine parameters.




**IP
67**

POWerview® U120

171-2049
01-2025

DIMENSIONS

IMAGES DO NOT REFLECT ACTUAL DISPLAY - FOR EXAMPLE ONLY

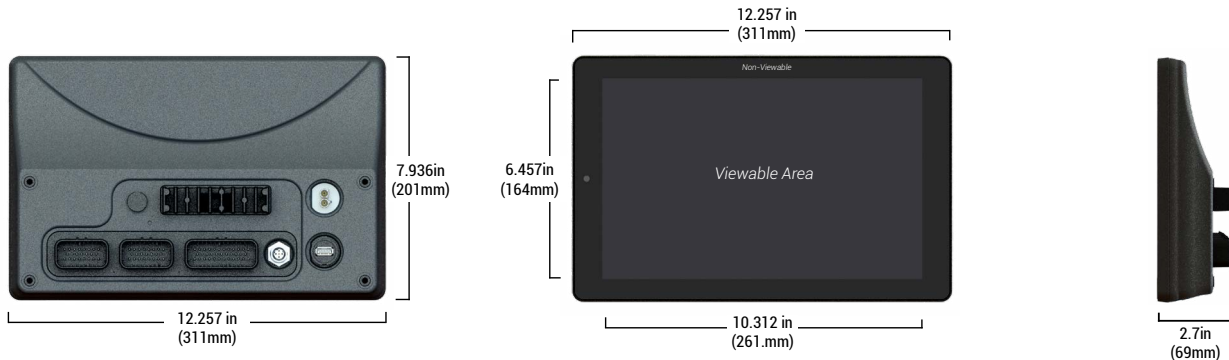

PRODUCT SPECIFICATIONS

COMPUTING		INTERFACES	
PROCESSOR	Renesas R-Car M2 with Arm Cortex A15 dual-core processor @ 1.5 GHz (32-bit)	CAN	2CAN J1939
OPERATING SYSTEM	QNX® Realtime Operating System	SERIAL	2x USB 2.0, 1x RS-485
STORAGE	16GB eMMC flash for operating systems and applications	WIFI	802.11 (a, b, g, n)
RAM	1 GB	ETHERNET	100MB M12 Code D Connection
GRAPHICS	Renesas graphics processor	BLUETOOTH	Bluetooth 5.0
DISPLAY/HMI		INPUTS	5x Digital (active high) 3x Analog (0-5VDC, 2-20mA) 1x Frequency in (0.5Hz - 20kHz) 2x Antenna inputs via FAKRA connector
SCREEN	12-inch, LVDS TFT LCD w/ LED backlight 24bit color	OUTPUTS	2x Frequency outputs 1x 500mA switched low-side
RESOLUTION	1280 x 800	ELECTRICAL/ENVIRONMENTAL	
CONTRAST RATIO / BRIGHTNESS	1000:1, 1000 cd/m ²	OPERATING VOLTAGE	6-36 VDC, reverse polarity protected
TOUCH PANEL	Projected capacitive (PCAP) with glove touch	OPERATING TEMPERATURE	-30°C to 70°C
SURFACE	Anti-glare finish	PROTECTION	IP67
AUDIO/VIDEO		VIBRATION	ISOv 15003
ANALOG VIDEO	4x Analog Inputs (NTSC & PAL)	SHOCK	+/-50G in 3 axes
AUDIO	JDAB Radio Controls 1x A2B connection outputs AM, FM, FM HD, and DAB radio 2x Analog audio line inputs 3x AMP turn on outputs 5x differential stereo audio line	EMC/EMI	SAE J1113, ISO 13766, CE per 2014/30/EU

⚠️ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.ca.gov.

FOR MODEL & PART INFORMATION

FOR MANUAL & SUPPORT DOCUMENTS

FOR SUPPORT & WARRANTY

ENOVATIONCONTROLS.COM/U120

SUPPORT.ENOVATIONCONTROLS.COM

ENOVATIONCONTROLS.COM/SUPPORT

SALES CONTACT



CONTACT

✉ sales@novationcontrols.com

☎ +1 918.317.4100

www.novationcontrols.com

CORPORATE HEADQUARTERS

5311 S 122nd E Ave
Tulsa, Oklahoma, USA 74146

United States • United Kingdom • India • China



FM 28221 (Tulsa, OK-USA)
FM 29422 (UK)