

7-inch full color glove-friendly touchscreen

Rugged IP-65 Rated Enclosure

Essential display features at an unprecedented value

Compatible with CODESYS, an implementation of the IEC-61131-3 Standard



## UNLOCKING INDUSTRY-STANDARD CONTROL DEVELOPMENT WITH CODESYS

The OpenView™ S70 is a full-color, edge-to-edge touchscreen display powered by the NEXT DISPLAY PLATFORM™ and optimized for CODESYS® development. Built on an open, industry-recognized programming standard, the OpenView™ S70 enables rapid application development through reusable code, proven libraries, and a familiar IEC 61131-3 environment.

Easily viewed in full sunlight, the OpenView™ S70 features a high-brightness LCD housed in a rugged IP65-rated enclosure, delivering the reliable all-weather performance Enovation Controls is known for, now paired with faster development cycles and streamlined long-term support.

The OpenView™ S70 comes standard with a glass-front, glove-friendly touchscreen, making it well-suited for a wide range of industrial and mobile applications.

### BUILT FOR:



**CODESYS**




**IP  
65**

[ENOVATIONCONTROLS.COM/S70](http://ENOVATIONCONTROLS.COM/S70)

# OpenView™ S70

## DIMENSIONS

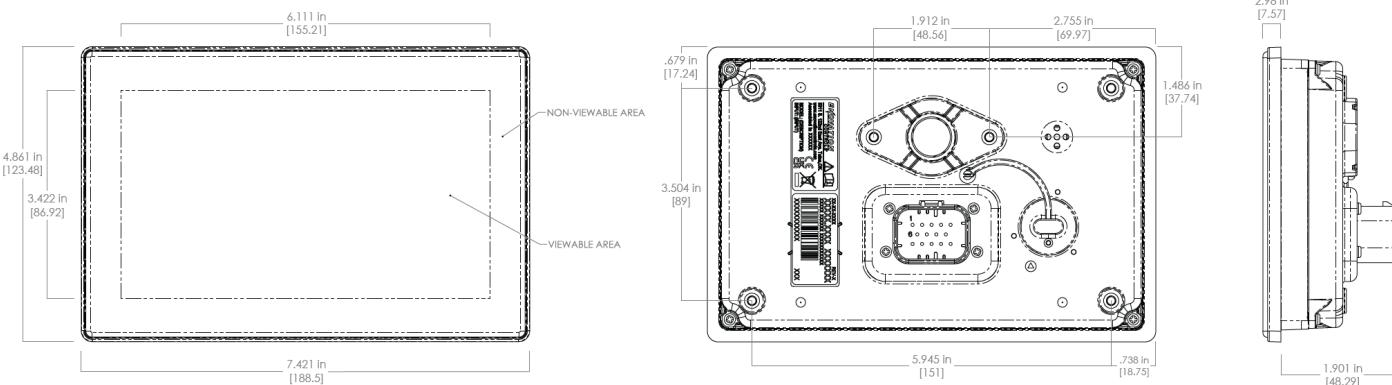

## PRODUCT SPECIFICATIONS

### COMPUTING

PROCESSOR	2x 650Mhz Arm Cortex A7 + GPU (OS/Graphics)
COPROCESSOR	1x 200Mhz Arm Cortex M4 (Real time control)
STORAGE	4GB eMMC flash for operating systems and applications
RAM	512MB, 16 Bit
GRAPHICS	Integrated graphics processor

### ELECTRICAL/ENVIRONMENTAL

OPERATING VOLTAGE	6 – 36 VDC, reverse polarity protected
OPERATING TEMP	-20°C to 70°C
STORAGE TEMP	-30°C to 70°C
PROTECTION	IP65
VIBRATION	IEC 60068-2-64
SHOCK	IEC 60068-2-27
EMC/EMI	ISO 14982:2009, ISO 13766:2018

**WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

### INTERFACES

CAN	1CAN (2CAN OPTIONAL)
SERIAL	USB 2.0, *RS-485
WIFI	802.11b/g/n
BLUETOOTH	*Bluetooth V4.2 BR/EDR and Bluetooth LE specification
INPUTS	2x Resistive (0-5V), 2x Dig/Ana (0-36v)
OUTPUTS	2x 500 mA Low-side
USB	USB Type-C with Locking Connector

### DISPLAY/HMI

SCREEN	7-inch, RGB IPS LCD w/ LED backlight 24bit color
RESOLUTION	1024 x 600
CONTRAST RATIO	800:1
TOUCH PANEL	Projected capacitive (PCAP) with glove touch
BUZZER	For alarms and notifications. 80dB, Adjustable Frequency

\*Bluetooth and RS485 not available on CODESYS®

FOR MODEL & PART INFORMATION

[ENOVATIONCONTROLS.COM/S70](http://ENOVATIONCONTROLS.COM/S70)

FOR MANUAL & SUPPORT DOCUMENTS

[SUPPORT.ENOVATIONCONTROLS.COM](http://SUPPORT.ENOVATIONCONTROLS.COM)

FOR SUPPORT & WARRANTY

[ENOVATIONCONTROLS.COM/SUPPORT](http://ENOVATIONCONTROLS.COM/SUPPORT)

## SALES CONTACT

**ENOVATION**  
CONTROLS®  
A HELIOS TECHNOLOGIES COMPANY

CONTACT  
✉ [sales@enovationcontrols.com](mailto:sales@enovationcontrols.com)  
☎ +1 918.317.4100  
[www.enovationcontrols.com](http://www.enovationcontrols.com)

CORPORATE HEADQUARTERS  
5311 S 122nd E Ave  
Tulsa, Oklahoma, USA 74146  
United States • United Kingdom • India • China



FM 28221 (Tulsa, OK-USA)  
FM 29422 (UK)