


Air Temperature Sensor - Model 12

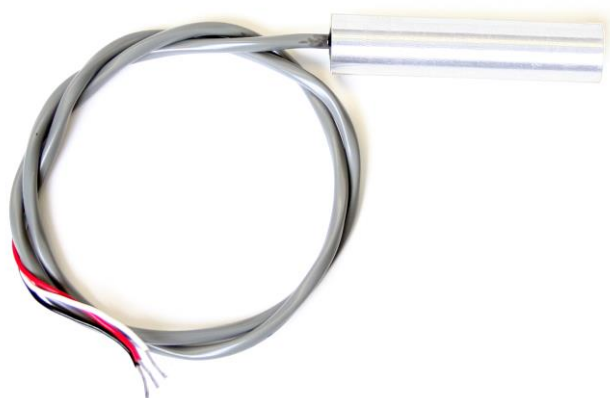


The Model 12 Air Temperature Sensor (P/N 10-70-7483) is intended for use in applications that monitor slowly changing temperatures. The unit gives approximately .5 °F (.25 °C) resolution when used with an 8-bit analog input.

Applications for the probe include the following:

- Monitor ambient temperature and signal wind machines to start.
- Monitor and maintain cargo temperatures.

Sensor Hookup

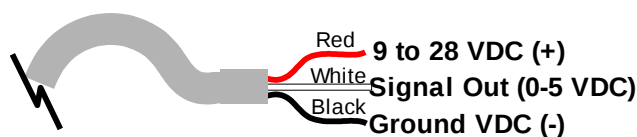

Temperature Sensing Range

VDC Out	°C	°F
0.00	-18	0
0.25	-14.5	5.8
0.50	-11.4	11.5
0.75	-8.2	17.3
1.00	-5	23.0
1.25	-1.8	28.8
1.50	1.4	34.5
1.75	4.6	40.3
2.00	7.8	46.0
2.25	11	51.8
2.50	14.2	57.5
2.75	17.4	63.3
3.00	20.6	69.0
3.25	23.8	74.8
3.50	27	80.5
3.75	30.2	86.3
4.00	33.3	92.0
4.25	36.6	97.8

Specifications

Temperature Capability

Useful Operating Temperature Range: 0°F to 115°F (-18°C to 46°C)

Component Temperature Range: -85°F to 300°F (-65°C to 150°C)

Accuracy: 2% of full scale with software offset correction.

Voltage

Power Input Voltage: 9 to 28 VDC

Current Draw: 1 mA

Cable: 2-foot length, 22 AWG, stranded

Clamp: ½" ID, provided (P/N 00-03-0392)

ENOVATION CONTROLS CORPORATE HEADQUARTERS
5311 S 122ND EAST AVENUE
TULSA, OK 74146

ENOVATION CONTROLS LTD. - UNITED KINGDOM
CHURCH ROAD LAVERSTOCK
SALISBURY SP1 1QZ UK

SUN MURPHY INTERNATIONAL TRADING (SHANGHAI) CO., LTD
B15 ROOM, 6# BUILDING, 351 SIZHUAN ROAD
SONGJIANG DISTRICT, SHANGHAI 201601, CHINA

ENOVATION CONTROLS INDIA PVT. LTD.
301, 3RD FLOOR, KRSNA CHAMBERS,
11 GALAXY GARDENS, NORTH MAIN ROAD,
KOREGAON PARK, PUNE 411001,
MAHARASHTRA, INDIA

U.S. SALES & SUPPORT

PHONE: 918 317 4100
EMAIL: SALES@ENOVATIONCONTROLS.COM
WWW.ENOVATIONCONTROLS.COM

INTERNATIONAL SALES & SUPPORT

EUROPE, MIDDLE EAST, AFRICA
PHONE: +44 1722 410055
EMAIL: SALES@ENOVATIONCONTROLS.EU

CHINA
PHONE: +86 21 6237 5885
EMAIL: APSALES@ENOVATIONCONTROLS.COM

INDIA
PHONE: +91 91581 37633
EMAIL: INDIA@ENOVATIONCONTROLS.COM



FM 28221 (Tulsa, OK - USA)
FM 29422 (UK)

In order to consistently bring you the highest quality, full-featured products, we reserve the right to change our specifications and designs at any time. MURPHY products and the Murphy logo are registered and/or common law trademarks of Enovation Controls, LLC. This document, including textual matter and illustrations, is copyright protected by Enovation Controls, LLC, with all rights reserved. (c) 2021 Enovation Controls, LLC. A copy of the warranty may be viewed or printed by going to www.enovationcontrols.com/warranty

Warranty - A limited warranty on materials and workmanship is given with this Murphy product.
A copy of the warranty may be viewed or printed by going to www.enovationcontrols.com/warranty